




Audi A3 g-tron

Sportback, as of 2020

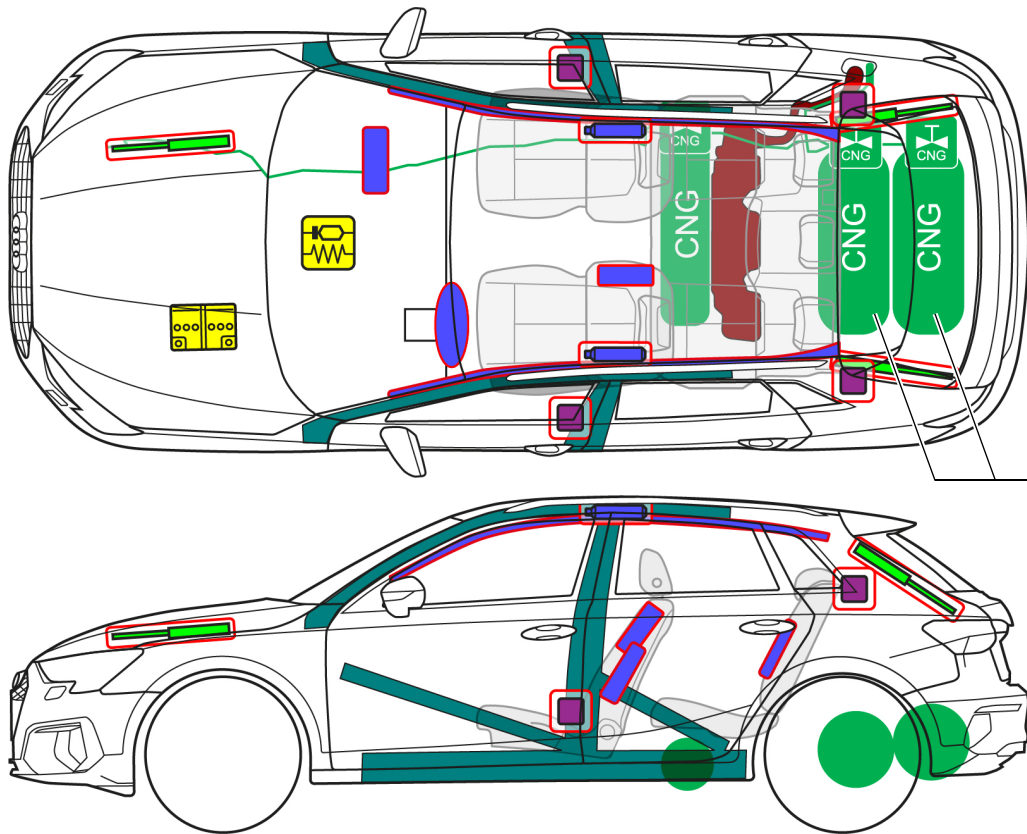

Note: The illustration shows the maximum possible range of equipment.

| | | | | | | | | | |
|--|--------------------------------------|--|------------------------------|--|-------------------------|--|---|--|-------------------------------------|
| | Airbag | | Stored gas inflator | | Seat belt pretensioner | | SRS control unit | | Pedestrian protection active system |
| | Automatic rollover protection system | | Gas strut / preloaded spring | | High-strength zones | | Special attention | | |
| | Battery, low-voltage | | Ultra-capacitor, low-voltage | | Fuel tank | | Gas tank | | Safety valve |
| | Battery, high-voltage | | Power cable, high-voltage | | Separator, high-voltage | | Fuse box, disabling high-voltage system | | Ultra-capacitor, high-voltage |
| | Fuel tank, petrol | | CNG gas tank | | CNG shut-off valve | | Carbon structure | | |



Audi A3 g-tron

Sportback, as of 2020

1. Identification / recognition

Logo



Logos can be deselected


Gas filler neck




2. Immobilisation / stabilisation / lifting

Immobilise the vehicle

Press the Park button "P" and apply the parking brake.



Lifting points

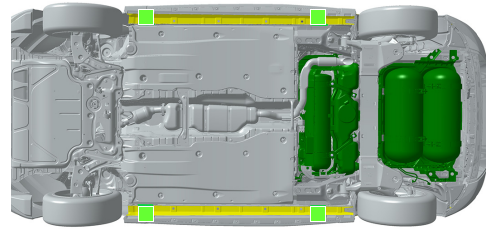

Suitable lifting points

Gas tanks

3. Disable direct hazards / safety regulations

Turn off the ignition



Press the START-STOP button without depressing the brake pedal




A key card or a smartphone app can also be used instead of a remote control key.


Manually shut off gas tanks



Remove tank covers

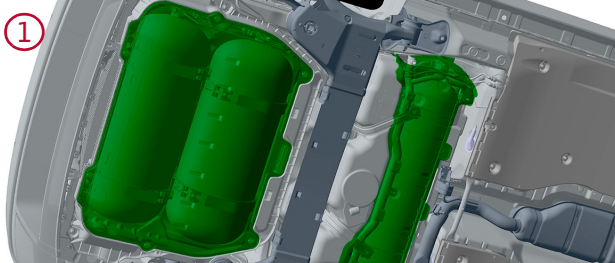

Localise the gas tank shut-off valves

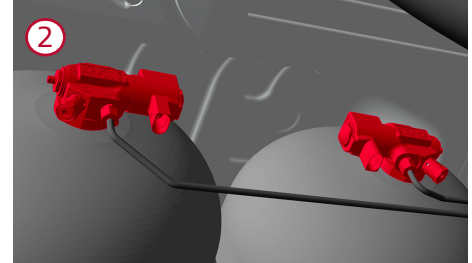

Turn the shut-off valve clockwise to the stop with a size 5 open-jaw or ring spanner







Audi A3 g-tron

Sportback, as of 2020

Disconnect the 12-volt battery

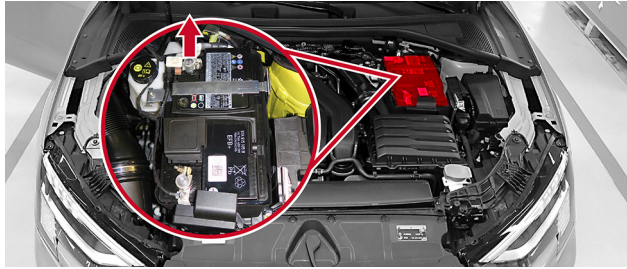

4. Access to the occupants

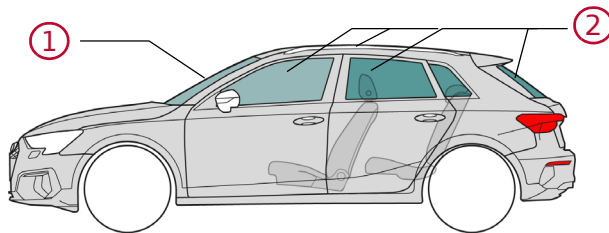

Glass types:

- ① Composite safety glass
- ② Single-layer safety glass

5. Stored energy / liquids / gases / solids



max. 260 bar



9 l



12 V

6. In case of fire



The gas tank excess pressure relief mechanisms open at approx. 110°C (blow-off noise). The tanks are emptied after approx. 90 seconds. Wear suitable safety equipment.



7. In case of submersion

Allow the water to drain off after the vehicle has been recovered. If gas escapes, close the tank shut-off valves (see Section 3).

8. Towing / transportation / storage

Make sure that the gas tanks are not damaged when towing or parking the vehicle. If gas escapes, close the tank shut-off valves (see Section 3).

















Audi A3 g-tron

Sportback, as of 2020

9. Important additional information

10. Explanation of pictograms used

| | | | | | | | |
|---|--|--|---|--|--|--|---|
|  Flammable |  Explosive |  Hazardous to the human health |  Environmental hazard |  Gases under pressure |  Petrol vehicle |  CNG vehicle |  Gas line |
|  Use lots of water to extinguish the fire |  Use wet foam to extinguish the fire |  Use powder to extinguish the fire |  Release the bonnet |  Use thermal infrared camera |  Remove smart key | | |